


# NT74



28.5×10.1×12.5



40019280



US E158859

## Features

- Small size, light weight.
- Low coil consumption.
- PC board mounting.
- Suitable for household electrical appliances, automation system, electrical equipment, instrument, meter telecommunication facilities and remote control facilities.

## Ordering Information

**NT74** **1C** **S** **10** **DC12V** **N** **G**  
 1      2      3      4      5      6      7

1 Part number:NT74  
 2 Contact arrangement:1A:1A;1C:1C;C2:1C2;  
 2A:2A;2B:2B;2C:2C  
 3 Enclosure:S: Sealed type; Z: Dust cover

4 Contact rating:1A,1C:8A,10A/250VAC 30VDC;  
 2A,2B,2C:5A/250VAC 30VDC  
 5 Coil rated voltage(V):DC:5,6,9,12,18,24,48,60  
 6 Contact material: N: AgNi; S:AgSnO<sub>2</sub>  
 7 Contact plating: Nil:Standard; G:Gold plated

## Contact Data

Contact Arrangement	1A (SPSTNO) 1C (SPDT(B-M)) 1C2 (SPDT(B-M)) 2A (DPSTNO) 2B(DPSTNC) 2C (DPDT(B-M))		
Contact Material	AgNi AgSnO <sub>2</sub>		
Contact Rating (resistive)	1A,1C,1C2:8A,10A/250VAC,30VDC 2A,2B,2C:5A/250VAC,30VDC		
Max. Switching Power	1A,1C,1C2:300W 2500VA 2A,2B,2C:150W 1250VA		
Max. Switching Voltage	440VAC 125VDC	Max. Switching Current:10A	
Contact Resistance or Voltage drop	<100mΩ	Item 4.12 of IEC 61810-7	
Operational life	Electrical	10 <sup>5</sup>	Item 4.30 of IEC 61810-7
	Mechanical	10 <sup>7</sup>	Item 4.31 of IEC 61810-7

**CAUTION:** 1.For the intermediate current(10mA/6VDC~100mA/28VDC), it only applies to the room temperature.  
 2.For gold plated version, the min. Switching current and min. switching voltage is 50mA/6VDC; for non gold plated version (standard type),the min. switching current and min. switching voltage is 100mA/6VDC.

## Coil Parameter

Dash numbers	Coil voltage VDC		Coil resistance Ω ±10%	Pickup voltage VDC(max) (70%of rated voltage )	Release voltage VDC(min) (10% of rated voltage)	Coil power consumption W	Operate Time ms	Release Time ms
	Rated	Max.						
005-220	5	6.5	113	3.5	0.5	0.22	≤10	<5
006-220	6	7.8	164	4.2	0.6			
009-230	9	11.7	360	6.3	0.9	0.23	≤10	<5
012-230	12	15.6	620	8.4	1.2			
018-250	18	23.4	1295	12.7	1.8	0.25	≤10	<5
024-250	24	31.2	2350	16.8	2.4			
048-290	48	62.4	8000	33.6	4.8	0.29	≤10	<5
060-290	60	78	12500	42	6.0			

**CAUTION:** 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.  
 2.Pickup and release voltage are for test purposes only and are not to be used as design criteria.

### Operation condition


Insulation Resistance	1000MΩ min (at 500VDC)	Item 7 of IEC 60255-5
Dielectric Strength Between contacts Between contact and coil Between contact sets	50Hz 1000V 1min 50Hz 5000V 1min 50Hz 2500V 1min	Item 6 of IEC 60255-5 Item 6 of IEC 60255-5 Item 6 of IEC 60255-5
Shock resistance	functional: NO:98m/s <sup>2</sup> NC:49m/s <sup>2</sup> Survival:980m/s <sup>2</sup>	IEC 68-2-27 Test Ea
Vibration resistance	10Hz~55Hz double amplitude NO: 1.65mm (no coil voltage) NC: 0.8mm	IEC 68-2-6 Test Fc
Terminals strength	10N	IEC 68-2-21 Test Ua1
Solderability	260℃ ± 5℃ 3s ± 0.5s	IEC 68-2-20 Test Ta method 1
Ambient Temperature	-40℃~85℃	
Relative Humidity	35%~85% (at 40℃)	IEC 68-2-3 Test Ca
Mass	8g	

### Safety approvals

Safety approval	UL&CUR	VDE
Load	1A, 1C, 1C2: 8A, 10A/250VAC, 30VDC 2A, 2C: 5A/250VAC, 30VDC	8A/250VAC

### Dimensions

mm /inch

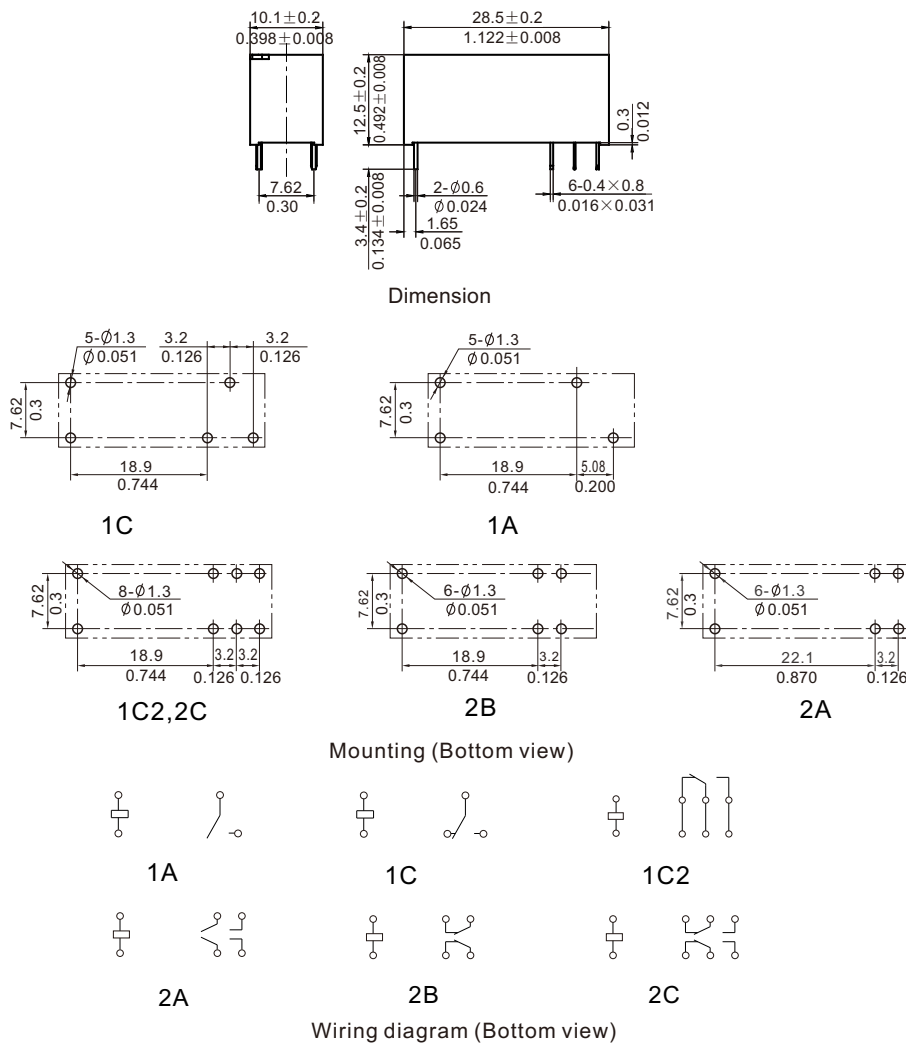

NOTES 1).Dimensions are in millimeters.  
2).Inch equivalents are given for general information only.