

- ◆ Control Voltage: 5VDC, 12VDC, 24VDC
- ◆ Load Voltage: 240VAC, 380VAC
- ◆ Load Current: 2A, 3A
- ◆ Dielectric Strength: 4000Vrms
- ◆ RoHS Compliant



Ordering Information

KSFA	380	D	3	R	-24	N	(XXX)
KSFA Series (1)	Load Voltage 240: 240VAC 380: 380VAC	DC Control	Load Current 2: 2Amp 3: 3Amp	Switching Mode Blank: Zero Crossing R: Random-on	Control Voltage 5: 5VDC 12: 12VDC 24: 24VDC	Blank: with RC N: without RC	Customized Code

General Specifications

Input Specifications (Ta=25°C)		
Control Voltage Range	5	4-6VDC
	12	9.6-14.4VDC
	24	19.2-28.8VDC
Must Turn-On Voltage	5	4VDC
	12	9.6VDC
	24	19.2VDC
Must Turn-Off Voltage	1VDC	
Maximum Input Current	5	25mA (@6VDC)
	12	25mA (@14.4VDC)
	24	25mA (@28.8VDC)


Output Specifications (Ta=25°C)		
Load Voltage Range	240VAC	24-280VAC
	380VAC	24-440VAC
Maximum Transient Overvoltage	240VAC	600Vpk
	380VAC	800Vpk
Load Current Range	2A	0.1-2A
	3A	0.1-3A
Maximum 1 Cycle Surge Current (50Hz)	2A	80A
	3A	160A
Maximum Turn-On Time	Random-on	1ms
	Zero Crossing	1/2cycle+1ms
Maximum Turn-Off Time	1/2cycle+1ms	
Maximum Off-State Leakage Current@Rated Load Voltage	without RC	0.1mA
	with RC	5mA
Maximum On-State Voltage Drop@Rated Current	1.5Vrms	
Minimum Off-State dv/dt@Maximum Rated Voltage	200V/μs	

General Specifications (Ta=25°C)		
Dielectric Strength (Input/Output,50/60Hz)	4000Vrms	
Minimum Insulation Resistance (@500VDC)	1000MΩ	
Ambient Temperature Range	-30°C ~ +80°C	
Storage Temperature Range	-30°C ~ +100°C	
Weight (Typical)	20g	


Applications

Suitable for lighting control, motor control, vending machine control, medical device control, valve control, and etc.



Outline Dimensions

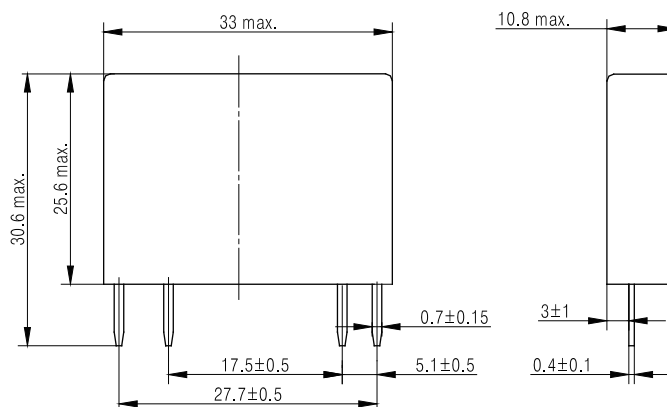

Wiring Diagram

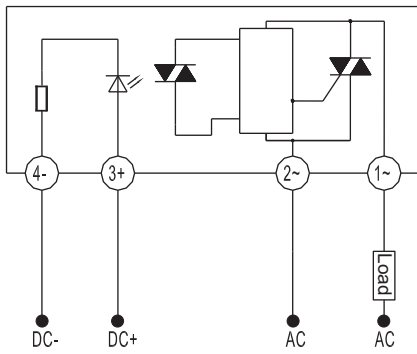

Thermal Derating Curve

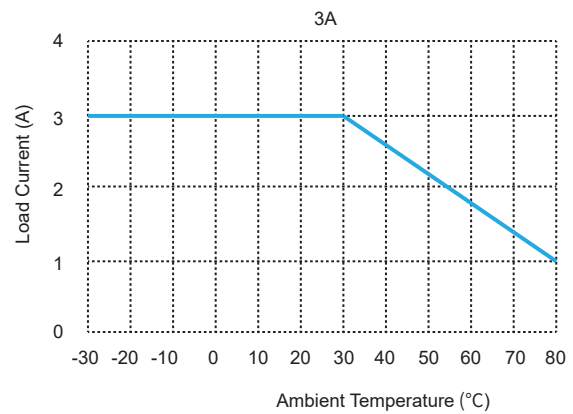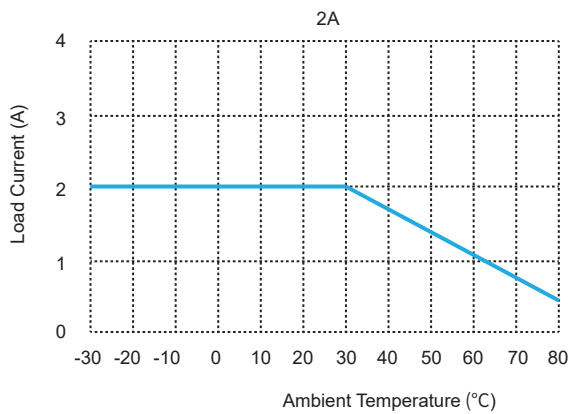

General Notes

1. Soldering must be finished within 10 seconds at 260°C, or finished within 5 seconds at 350°C. Otherwise it may cause damage to the relay.
2. Terminal polarity must be observed. Otherwise it may cause damage to the relay.
3. When ambient temperature is above 25°C, the maximum load current decreases. See thermal derating curve.

Agency Approvals (Certification)

