

Model V1G


MINIATURE HIGH VOLTAGE DIVIDER

Extend the range of your dmm to 25kV!




PRODUCT DESCRIPTION

For laboratory measurement, system test point, or control loop feedback, our precision, low drift, high voltage divider provides a low voltage output from voltages as high as 25,000 VDC. The 1000:1 divider is internally compensated for your digital multimeter's 10 meg ohm input impedance. Ratio tolerance is 1% and temperature drift is a low 50 PPM. This divider provides a low cost solution to high voltage measurement without the expense and bulk of a probe, and without the danger of an exposed resistor. Using our high voltage encapsulation techniques, the divider is protected from the problems that occur when high voltage is exposed to dust and moisture. PC pins and mounting holes make this module ideal for PCB mounting. The high voltage connection is made through a 30 kV silicone wire.

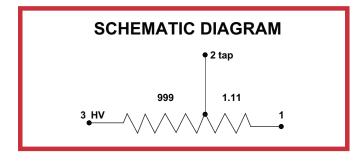

MECHANICAL SPECIFICATIONS

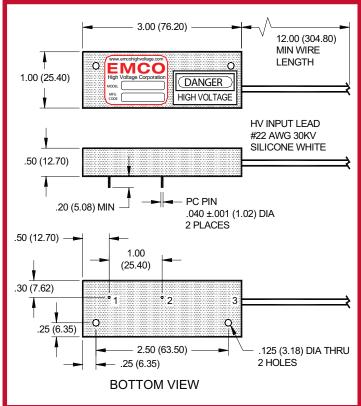

OUTLINE DRAWING

Dimensions are in Inches
Dimensional Tolerances: ± .03 (.76 mm)
(Metric Equivalents in Parentheses)

PIN#	FUNCTION
1	Ground
2	Output
3	HV Input

ELECTRICAL SPECIFICATIONS

PARAMETER	VALUE
VOLTAGE RANGE	1,000 to 25,000 VDC
RATIO	1000:1 into 10 MΩ
RATIO TOLERANCE	<1%
RATIO TEMP COEFFICIENT	<75 ppm/°C
TOTAL RESISTANCE	1,000 ΜΩ
OPERATING TEMP	-10° to +60°C*1 (CASE)

^{*} Notes:

PHYSICAL CHARACTERISTICS

PARAMETER	VALUE
SIZE	3 x 1 x 0.5 (76.2 x 24.5 x 12.7)
WEIGHT	1 Ounce (28.3 grams) approx.
PACKAGING	Fully encapsulated
CASE MATERIAL	Black glass/epoxy
WIRE	30 kV Silicone wire #22 AWG
MOUNTING	PC pins/mounting holes









XP EMCO reserves the right to make changes on products and literature, including specifications, without notice. XP EMCO standard product models are not recommended for "copy-exact" applications or any other application restricting product changes. "Copy-exact" options are available. Please contact an XP EMCO sales representative for more details.



WWW.XPPOWER.COM 4768K PAGE 1

Proper thermal management techniques are required to maintain safe case temperature at maximum power output.