



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司



Winstar Display Co., LTD

華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

SPECIFICATION

MODULE NO.: WF70A9SWAGLNN0#

General Specifications

Item	Dimension	Unit
Size	7.0	inch
Dot Matrix	800 x RGB x 480(TFT)	dots
Module dimension	165.8 (W) x 106.61 (H) x 6.5(D)	mm
Active area	152.40 x 91.44	mm
Pixel pitch	0.1905 x 0.1905	mm
LCD type	TFT, Normally Black, Transmissive	
View Direction	80/80/80/80	
TFT Interface	LVDS	
TFT Driver IC	HX8249-A + HX8678-C or Equivalent	
Aspect Ratio	15:9	
Backlight Type	LED, Normally White	
Touch Panel	Without Touch Panel	
Surface	Anti-Glare	

*Color tone slight changed by temperature and driving voltage.

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-30	—	+80	°C
Storage Temperature	TST	-40	—	+85	°C

Electrical Characteristics

Operating conditions

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage	Vcc	2.7	3.3	3.6	V
Current of power supply	Icc	—	133	200	mA

Interface


LCM PIN Definition

Pin	Symbol	Function		
1	VCC	Power voltage		
2	VCC	Power voltage		
3	GND	Power Ground		
4	GND	Power Ground		
5	LVD0N	Input pins without termination resistor for LVDS mode. Keep these pins floating or connect to VSS1 if not used.		
6	LVD0P			
7	GND	Power Ground		
8	LVD1N	Input pins without termination resistor for LVDS mode. Keep these pins floating or connect to VSS1 if not used.		
9	LVD1P			
10	GND	Power Ground		
11	LVD2N	Input pins without termination resistor for LVDS mode. Keep these pins floating or connect to VSS1 if not used.		
12	LVD2P			
13	GND	Power Ground		
14	LVDCKN	Input pins without termination resistor for LVDS mode. Keep these pins floating or connect to VSS1 if not used.		
15	LVDCKP			
16	GND	Power Ground		
17	LVD3N	Input pins without termination resistor for LVDS mode. Keep these pins floating or connect to VSS1 if not used.		
18	LVD3P			
19	DINT	Input data format selection. Effective when FCS=1.		
		DINT	Function	Note
		1	8-bit	Default
		0	6-bit	-
20	SC	RL & TB Selection 1: Left to Right, Top to Bottom. (Default) 0: Right to Left, Bottom to Left.		

2. Backlight PIN Definition

Pin	Symbol	Description
1	VLED+	Red, LED_ Anode
2	VLED-	Black, LED_ Cathode

Contour Drawing

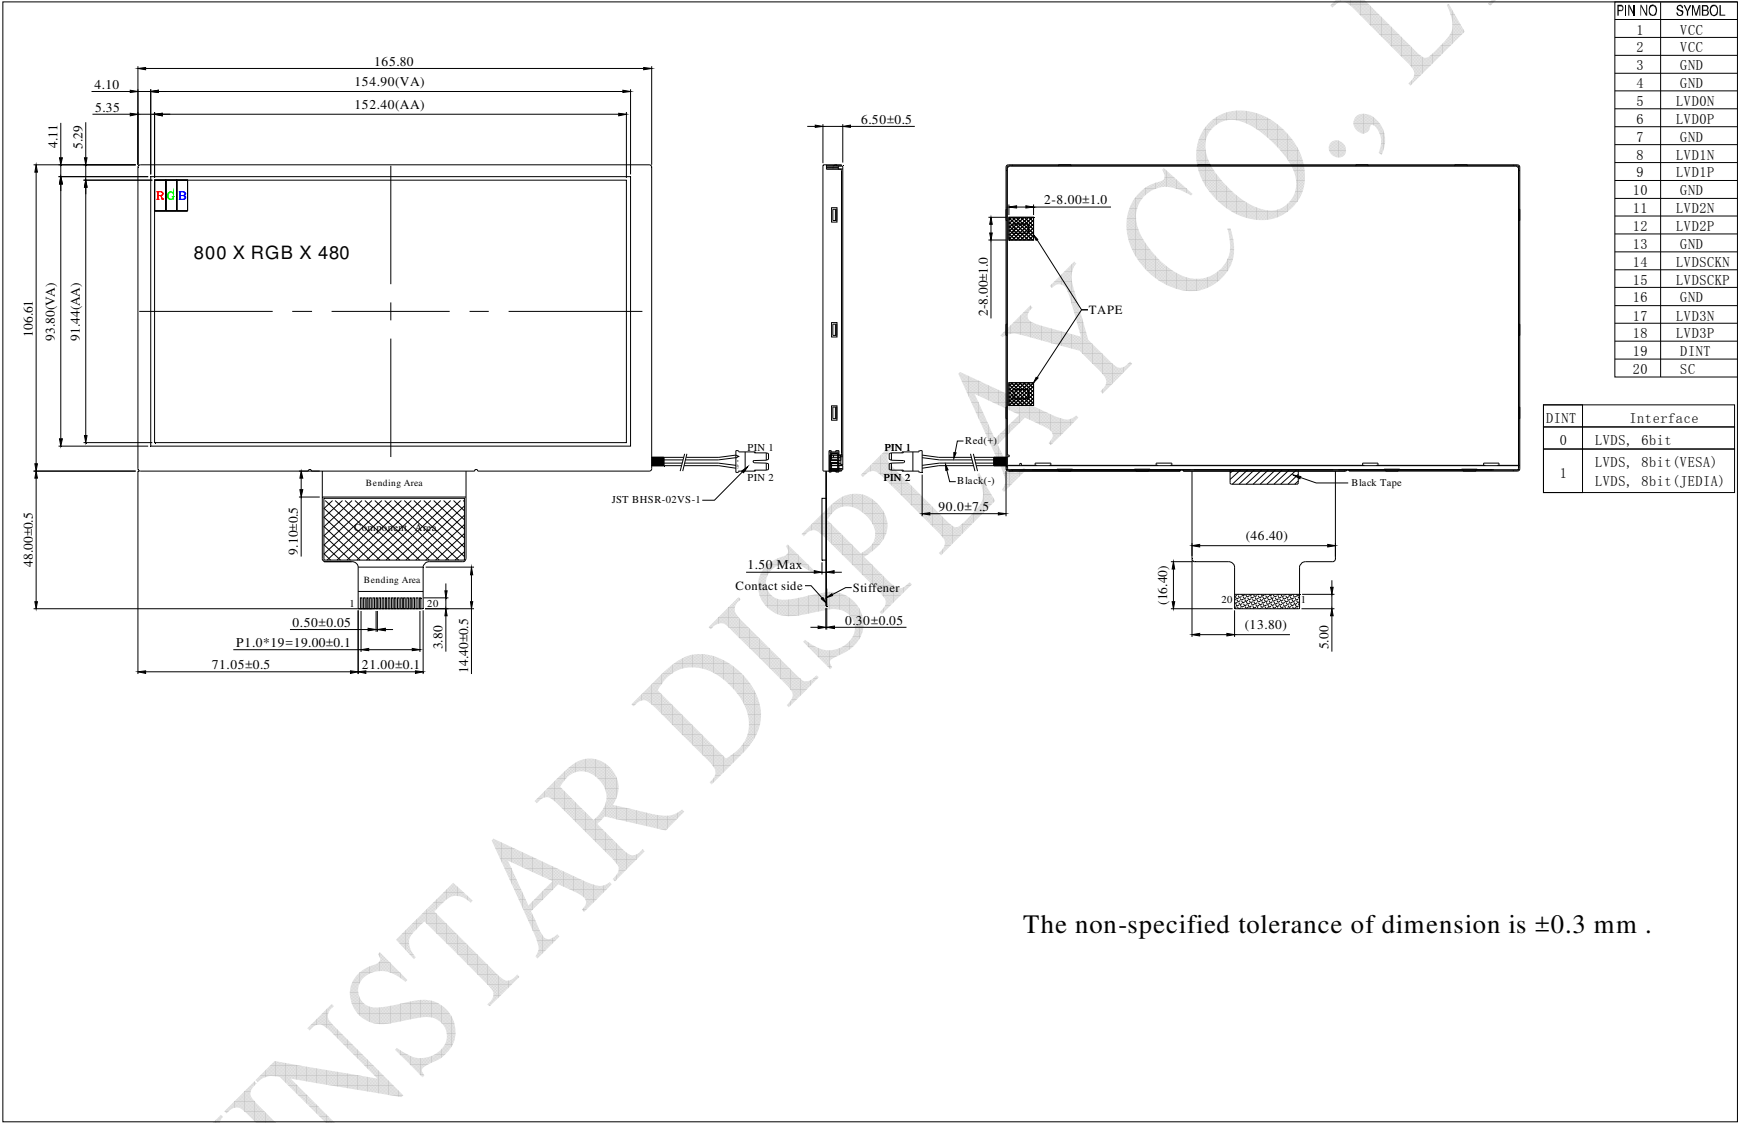

The non-specified tolerance of dimension is ± 0.3 mm .