
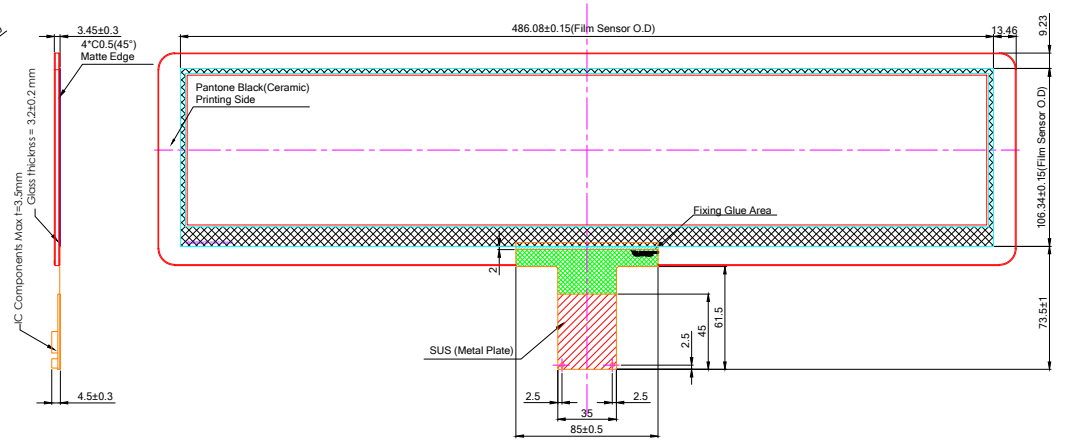


# Front VIEW

# Back VIEW

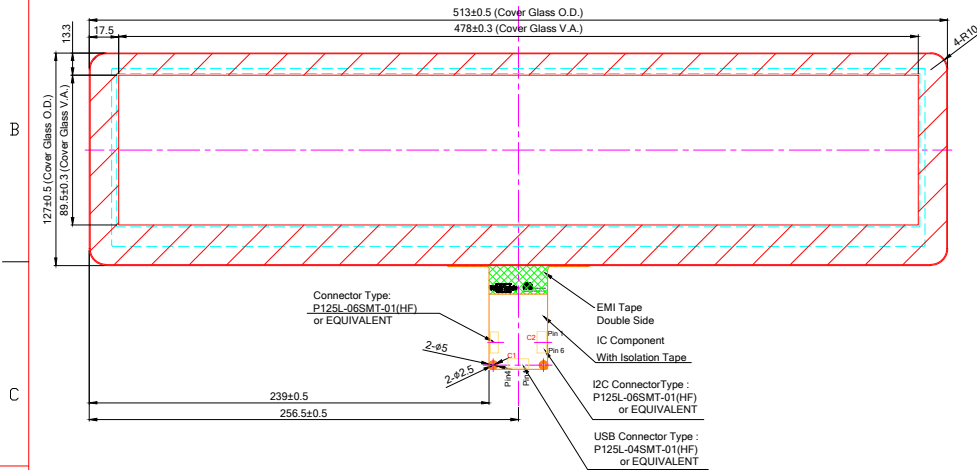

C1: Pin Define for USB 4 pin	
Pin 01	GND
Pin 02	D-
Pin 03	D+
Pin 04	VDD

C2: Pin Define for I2C 6 pin	
Pin 01	GND
Pin 02	SDA
Pin 03	SCL
Pin 04	VDD(5V)
Pin 05	INT
Pin 06	RST

- Spec:
- 1. General O.D. Tolerance :  ±0.5
  - 2. Border Type :  Matte
  - 3. Glass Type :  Fully-Tempered
  - 4. Surface treatment :  None
  - 5. Background Printing :  Ceramic
  - 6. Logo Printing :  None
  - 7. Transmittance Level : >85%
  - 8. Important Notes :
- Color 1 : Pantone Black

Note:

A. Distance between LCD and Touch need to have minimum 1 mm otherwise thinner dimension can cause noise problem between LCD and touch screen

B. If customer put a front conductive bezel all around we need to have minimum thickness of 2mm, if the thickness is lower can cause interference

C. Refer to the integration guide to avoid any integration noise issue

D. Before mass production customer needs to ask custom firmware for his final machine

Customer Approval		Part Number		RTPC192W-R32BC1-C					
Date	Rev.	Date	Person	Description					
Company Name									
Signature		Date	Design By	Date	Check By	Date	Approved By		
		20190802	Jeff						