

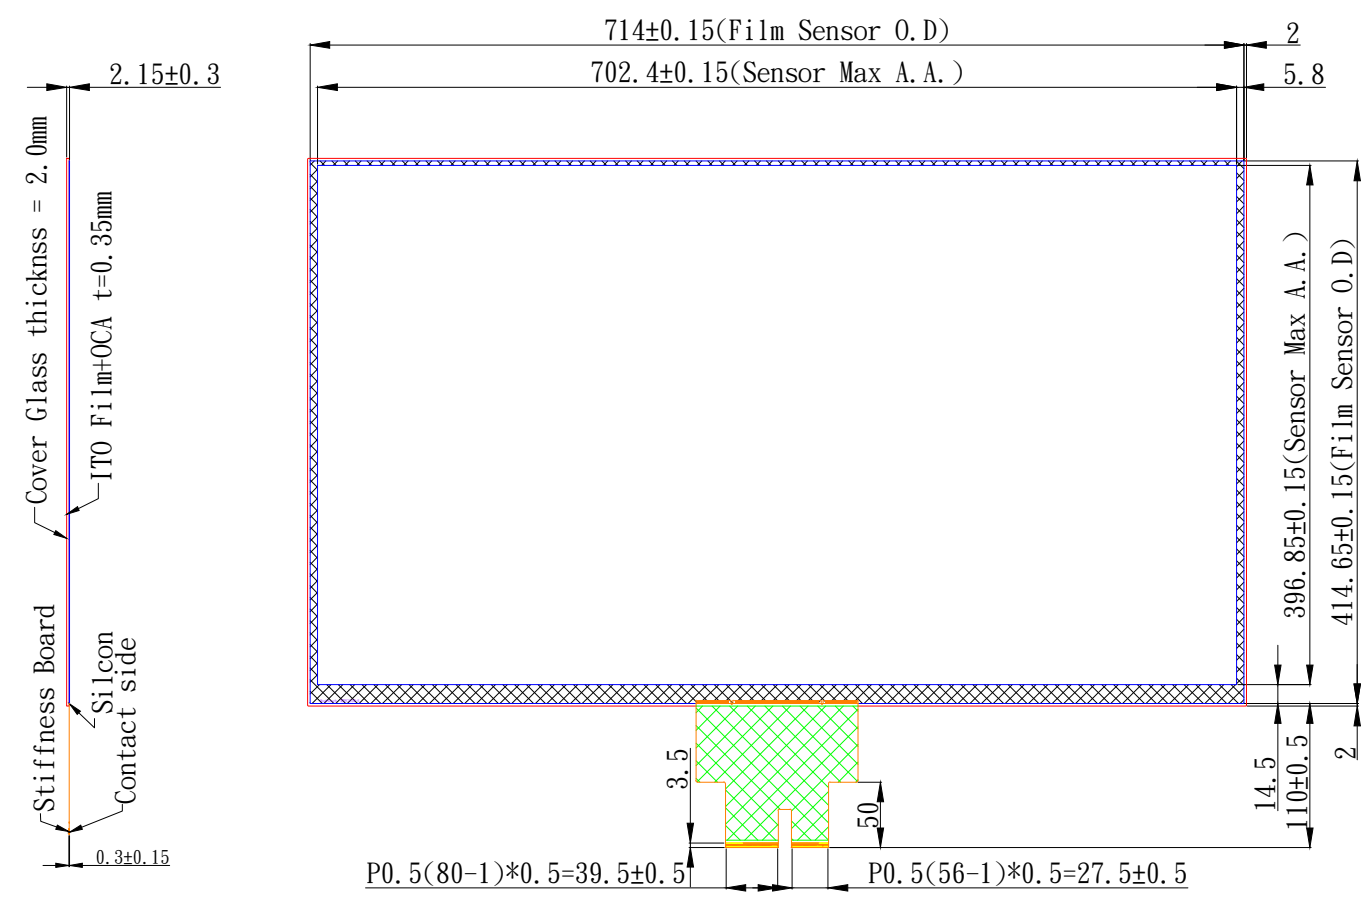


Front VIEW

Back VIEW

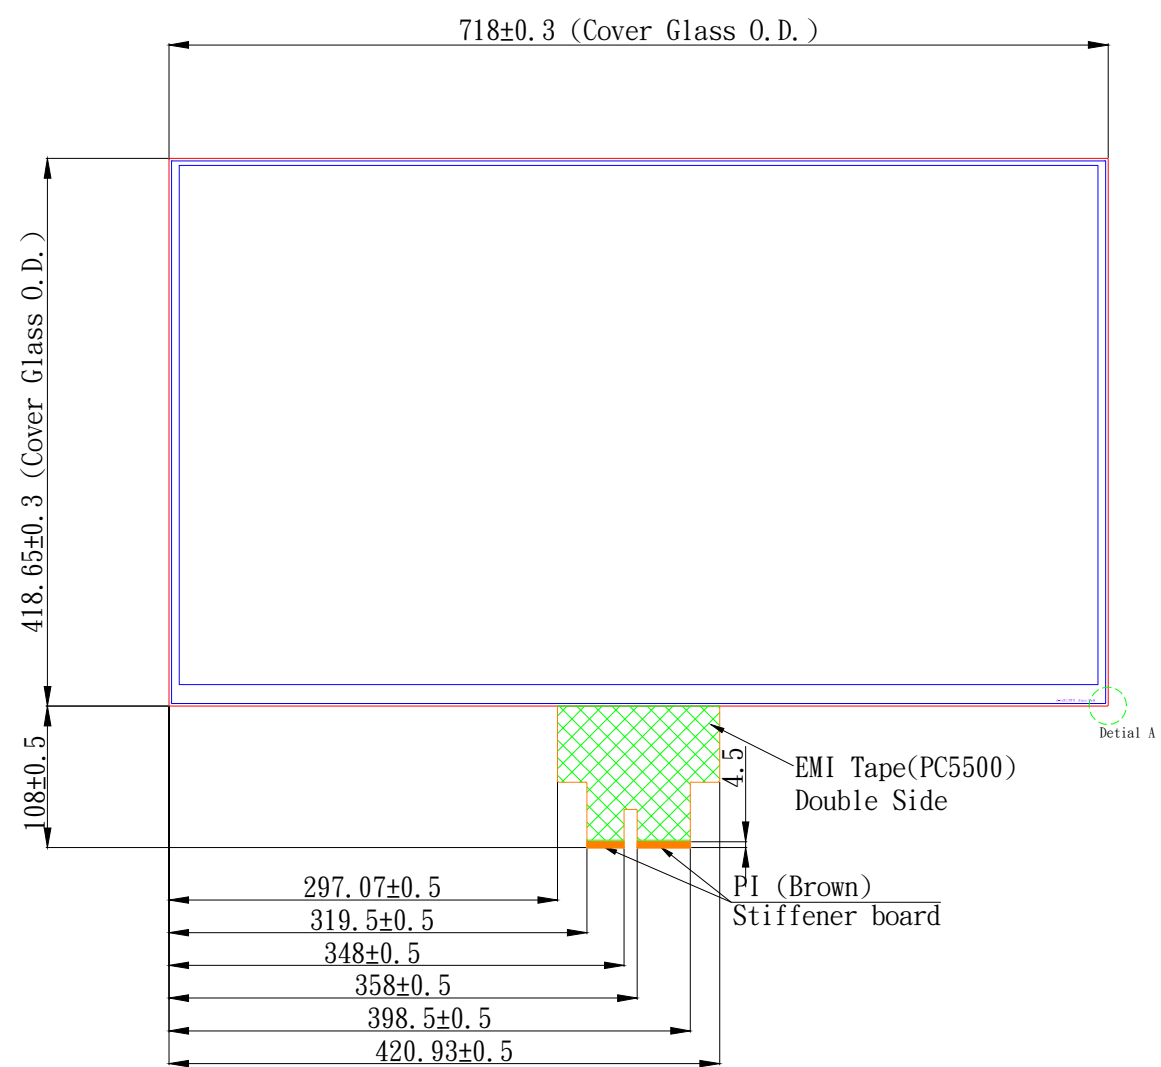

Detail A

- Note:
1. Tolerance: +-0.3mm
 2. Finger input only or special conductive pen
 3. Surface Hardness: 6H (Chemical Strength Glass)
 4. Transmittance: >85% (JIS-K7105)
 5. Surface Treatment: none
 6. Distance between LCD and touch panel need to be minimum 1.0mm otherwise touch maybe will not work correctly
 7. If customer put a front cover all around need use at least 2mm thick gasket between touch and metal frame
 8. USB max ripple acceptable is 50mV, in other case touch will not work correctly
 9. Referring to the integration guide to avoid any integration noise issue

元
理
管
圖
原
期

圖號 RTPC315W-S1.8TG1

2015/09/04	Matt	Add the EMI tape on FPC
2015/05/06	Matt	Modify the part number and FPC O.D.
版	年 月 日 設 計 審 查	變 更 內 容
設 計	2015/05/01 Candy 審 查	承 認

