



# Product Specification

|               |                                   |
|---------------|-----------------------------------|
| Product Name: | External -Driven Piezo Transducer |
| Part Number:  | TFM-05                            |
| Version:      | 1.01                              |
| Date:         | 2015-2-9                          |
| Note:         |                                   |


Company passed ISO 9001 / ISO TS16949 / ISO 14001 Certifications

## Revision History

| Rev. | Description                        | Author/Date     | Checked By | Approver |
|------|------------------------------------|-----------------|------------|----------|
| 1.01 | Quality Certificate Symbol revised | 刘宁<br>2015-2-9  | 汤礼东        | 王建成      |
| 1.0  | Released                           | 沈龙<br>2011-6-24 | 汤礼东        | 王建成      |

## 1. Part Number TFM-05

## 2. Dimension Drawing (Unit: mm)

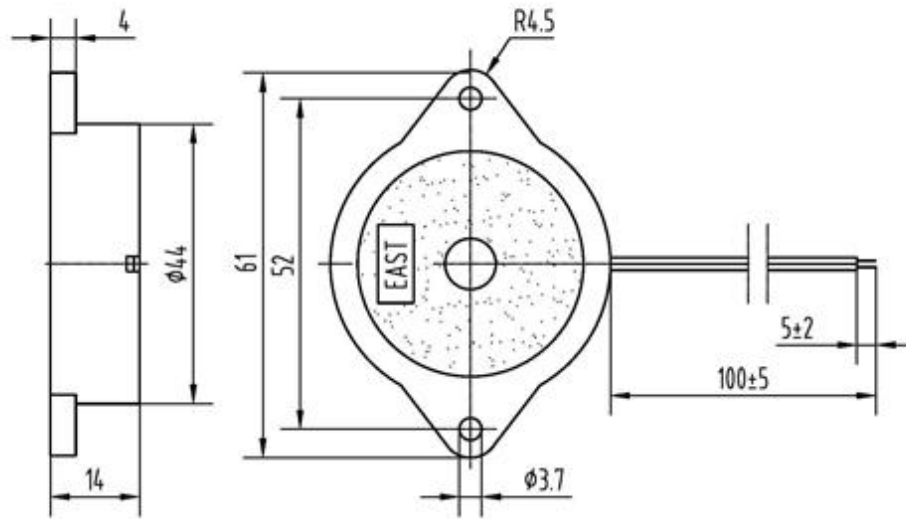


## 3. Specification

| No. | Item                      | Specification                        |
|-----|---------------------------|--------------------------------------|
| 3-1 | Min. Sound Pressure Level | 80dB/1.0kHz/12Vp-p square wave /30cm |
| 3-2 | Allowed Input Voltage     | 40Vp-p                               |
| 3-3 | Capacitance               | 66±30% nF (At 120Hz)                 |
| 3-4 | Max. Consumption          | 6mA/1.0kHz/12Vp-p square wave        |
| 3-5 | Resonant Frequency        | 1.0± 0.5kHz                          |
| 3-6 | Operating Temperature     | -20~+70°C                            |
| 3-7 | Case Material /Color      | ABS/Black                            |
| 3-8 | Weight                    | 10g                                  |
| 3-9 | Wire Standard             | UL1095-26AWG                         |

### NOTES:

Test should be made under the conditions of room temperature (20±10°C), normal humidity (60±20%) and normal atmospheric pressure. In this case, however, that the judgment is questionable, the test conditions are to be changed to room temperature 20±2°C, relative humidity 60~70% and normal atmospheric pressure

#### 4. Typical Frequency Response Curve

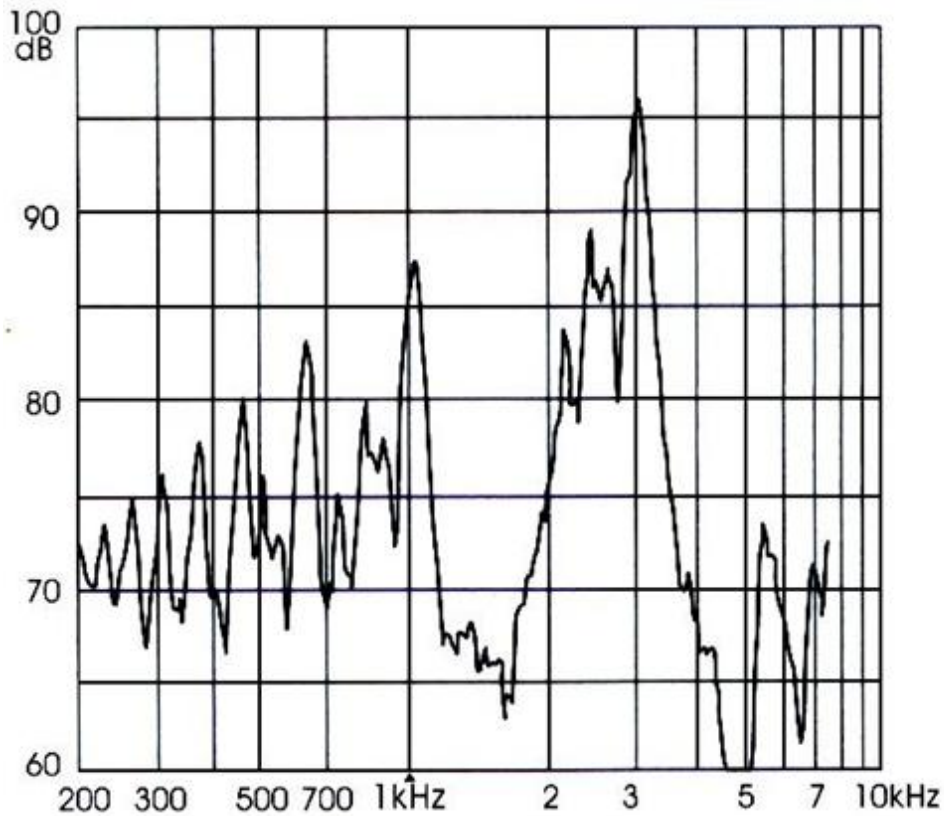


**Note:** Input Voltage 12Vp-p square wave  
Distance 30 cm

#### 5. Reliability Test


| No. | Item                                  | Method of Test  | Tolerance after Testing   |
|-----|---------------------------------------|---|---|
| 5-1 | Operating Temperature                 | -20~+70°C   | Sound pressure level initial value $\pm 10$ dB<br>Max. consumption value $\pm 20\%$<br>Capacitance value $\pm 20\%$ |
| 5-2 | Storage in high temperature           | Storage in +70°C test box 96 hours then exposed to the room temperature for 2 hours                                   |   |
| 5-3 | Storage in low temperature            | Storage in -20°C test box 96 hours then exposed to the room temperature for 2 hours                                   |   |
| 5-4 | Life test in the room temperature     | Operate the product continuously 5 seconds on 5 seconds off 300 hours at rated voltage                                |   |
| 5-5 | Temperature / humidity cycle test     | Storage in +40°C, 93 $\pm$ 3%RH test box 96 hours then exposed to the room temperature for 2 hours                    |   |
| 5-6 | Temperature (high and low) cycle test | Conduct the test for 5 cycles without applying power then expose to the room temperature for 2 hours.(See Figure 5-6) |   |

|     |                |  |  |
|-----|----------------|--|--|
| 5-7 | Vibration test | Conduct the test for the directions of X Y and Z for 0.5 hour each (total 1.5 hours). To-and Fri sweep time(from 10 to 55Hz and then 55 to 10) under single amplitude of 0.75mm is 3 minute, then expose to the room temperature for 2 hours |  |
| 5-8 | Drop test      | Drop a product naturally from the height of 700mm onto the surface of 100mm thick wooden board. Two directions: upper and side of the product are to be applied for this drop test once respectively   |  |
|     |                |  |  |

Figure 5-6

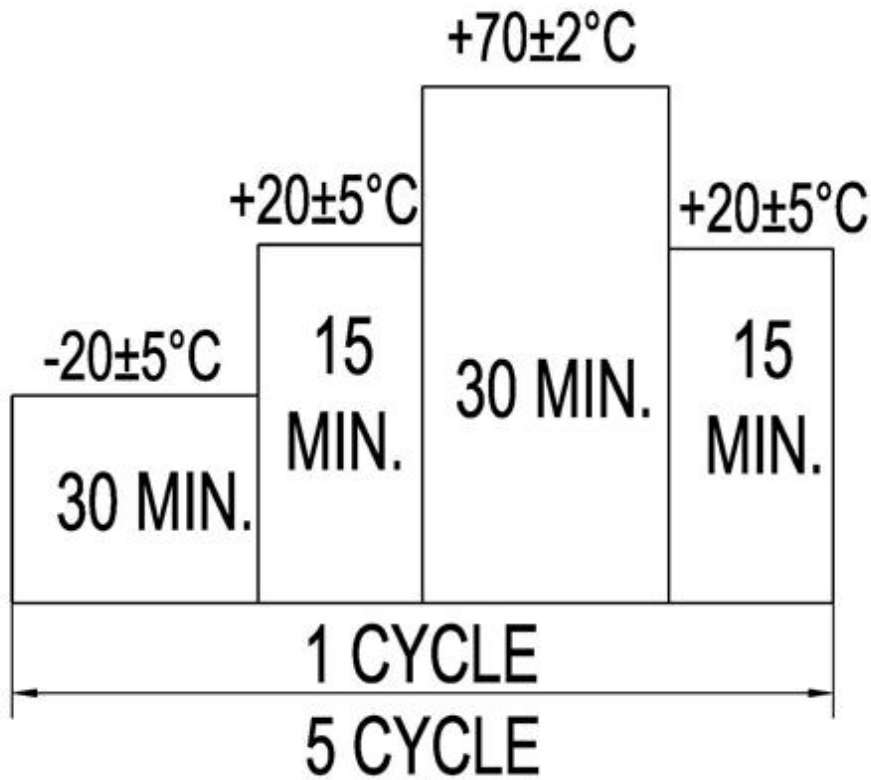

## 6. Electrical Testing Method

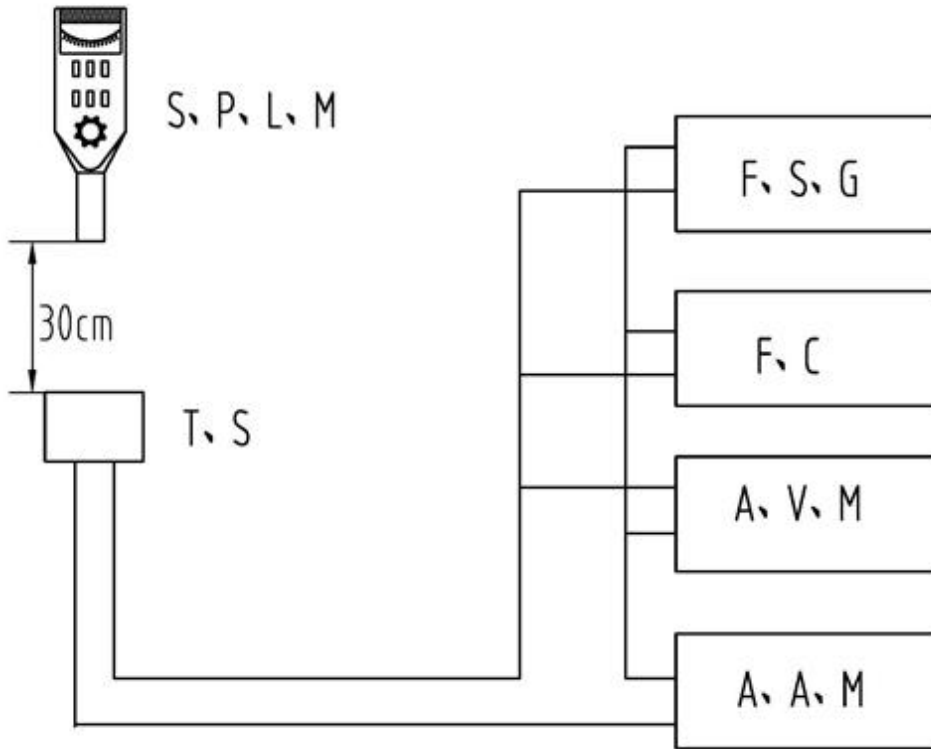

|         |                            |
|---------|----------------------------|
| S.P.L.M | Sound Pressure Level Meter |
| T.S     | Testing Sample             |
| F.C     | Frequency Counter          |
| F.S.G   | Frequency Signal Generator |
| A.V.M   | AC Voltage Meter           |
| A.A.M   | AC Ampere Meter            |

## 7. Packing Information

**Packing: 1000 pcs per export carton**

**Carton Size: 47× 30.5× 25 cm**

**G. Weight: 12.4 kgs N. Weight: 10.0 kgs**