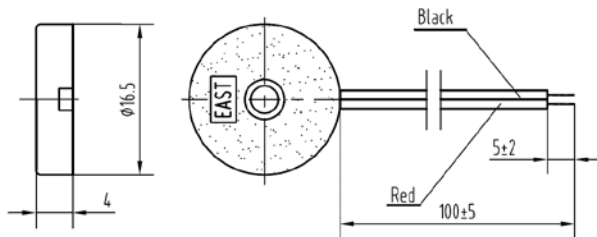
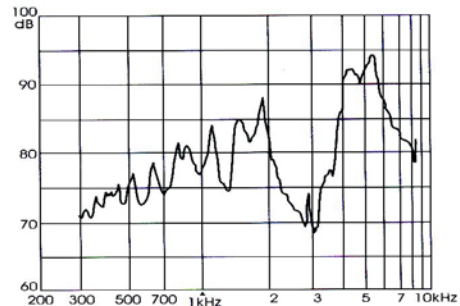


External-driven Piezo Transducer**TFM-23****DIMENSIONS:** (Unit: mm)**FEATURES:** □

- Mini-size Structure
- Multiple Application
- Light and Compact

APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

CHARACTERISTICS:**ELECTRICAL SPECIFICATIONS:**

Min. Sound Pressure Level at

4.0kHz/9V_{p-p} Square Wave/10cm.....80dB(A)

Capacitance at 1000Hz.....14nF±30%

Allowable Input Voltage.....25V_{p-p}

Max. Consumption

at 4.0kHz/9V_{p-p} Square Wave.....3mA

Resonant Frequency.....4.0±0.5kHz

Operating Temperature.....-20~+70°C

Case Material/Color.....PC/Black

Weight.....0.9g

Wire Standard.....UL1061-30AWG

PACKING INFORMATION:

(Packaging might vary without notice)

Packing: 8000 pcs per export carton

Carton Size: 47×30.5×19 cm

G. Weight: 8.7 kgs N. Weight: 7.2 kgs