

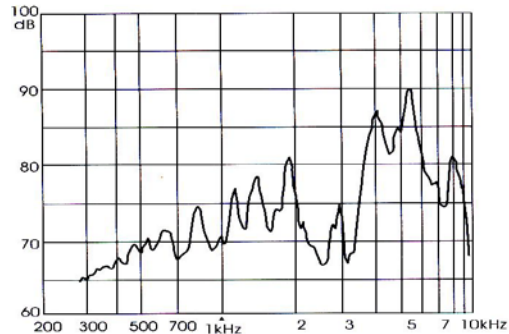
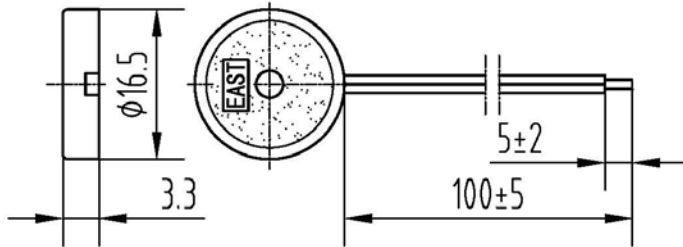
**External-driven Piezo Transducer****TFM-23T****FEATURES:** □

Rev.2

- Mini-size Structure
- Multiple Application
- Light and Compact

**APPLICATIONS:**

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

**CHARACTERISTICS:****DIMENSIONS: (Unit: mm)****ELECTRICAL SPECIFICATIONS:**

Min. Sound Pressure Level at

4.0kHz/9V<sub>p-p</sub> Square Wave/10cm..... 72dB(A)

Capacitance at 1000Hz.....9.5nF±30%

Allowable Input Voltage.....25V<sub>p-p</sub>

Max. Consumption

at 4.0kHz/9V<sub>p-p</sub> Square Wave.....2.5mA

Resonant Frequency..... 4.0±0.5kHz

Operating Temperature..... -20~+70°C

Case Material/Color.....ABS/Black

Weight.....0.9g

Wire Standard.....UL1571-30AWG

**PACKING INFORMATION:***(Packaging might vary without notice)*

Packing: 8000 pcs per export carton

Carton Size: 47×30.5×19 cm

G. Weight: 8.7 kgs N. Weight: 7.2 kgs