

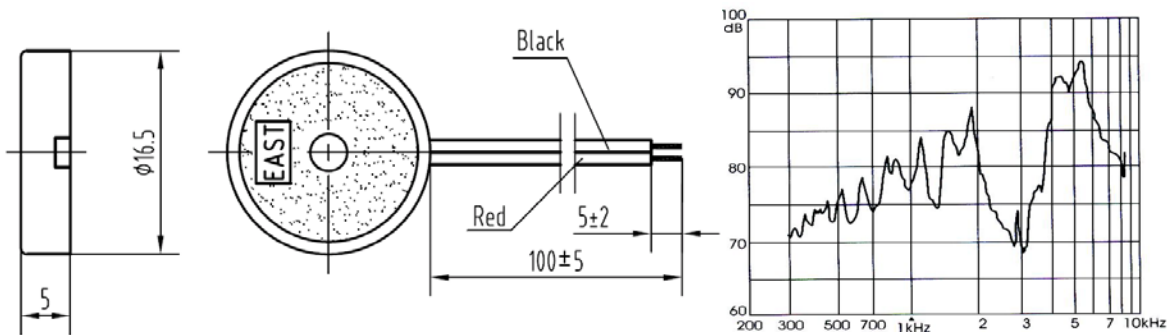
**External-driven Piezo Transducer****TFM-23A****FEATURES:** □

Rev.2

- Mini-size Structure
- Multiple Application
- Light and Compact

**APPLICATIONS:**

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

**DIMENSIONS: (Unit: mm)****CHARACTERISTICS:****ELECTRICAL SPECIFICATIONS:**

Min. Sound Pressure Level at

4.0kHz/9V<sub>p-p</sub> Square Wave/10cm.....80dB(A)

Capacitance at 1000Hz.....9.5nF±30%

Allowable Input Voltage.....25V<sub>p-p</sub>

Max. Consumption

at 4.0kHz/9V<sub>p-p</sub> Square Wave.....2.5mA

Resonant Frequency.....4.0±0.5kHz

Operating Temperature.....-20~+70°C

Case Material/Color.....PC/Black

Weight.....0.9g

Wire Standard.....UL1095-28AWG

**PACKING INFORMATION:***(Packaging might vary without notice)*

Packing: 8000 pcs per export carton

Carton Size: 47×30.5×19 cm

G. Weight: 8.7 kgs N. Weight: 7.2 kgs